


GAIA R75-S



GA75-R01QS (with plate M-GA01-K01)

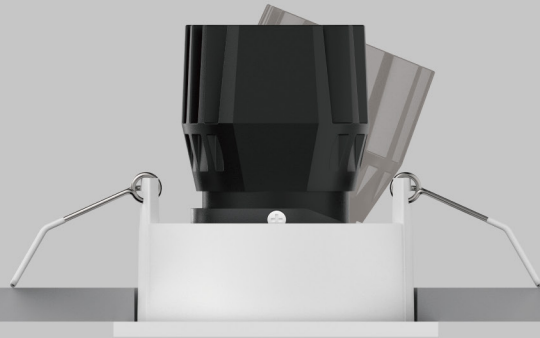

White

Black

White



Black



GA75-R01QS (with plate M-GA01-K01)

M-GA01-K01



GA75-R01QS



25° / 360°



83mm
3.27"

82mm
3.23"
86mm
3.39"

Basic Information

Model	GA75-R01QS (with plate M-GA01-K01)
Embedded Parts	With Trim
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black
Material	Aluminum
Cutout Size	∅ 75mm
Light Direction	25° 360°
IP Rating	IP20
Power	Max.12W
Input Voltage	DC36V
Input Current	Max. 300mA

Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	46°
UGR	< 13
LED Lifespan	50000hrs


Driver Voltage AC100-120V AC220-240V

Driver Options ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

GAIA R75-2S



Double GA75-R01QS (with plate M-GA01-K02)

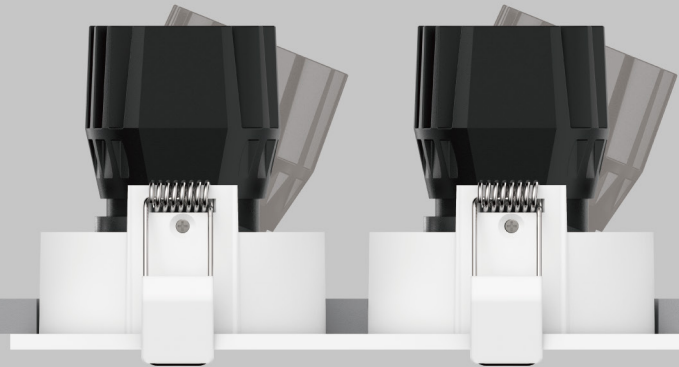

White

Black



White



Black



Double GA75-R01QS (with plate M-GA01-K02)



Basic Information

Model	Double GA75-R01QS (with plate M-GA01-K02)
Embedded Parts	With Trim
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black
Material	Aluminum
Cutout Size	160*75mm
Light Direction	25° 360°
IP Rating	IP20
Power	Max. 2*12W
Input Voltage	DC36V
Input Current	Max. 2*300mA

Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	46°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI